

 **MUSIC**  
FOR **YOUR**  
**WALLS**









What is music?

The wave that soothes ruffled nerves.

The expression that connects the detached.

The beat of passion.

The rhythm of love.

Music is in solace.

Music is in joy.

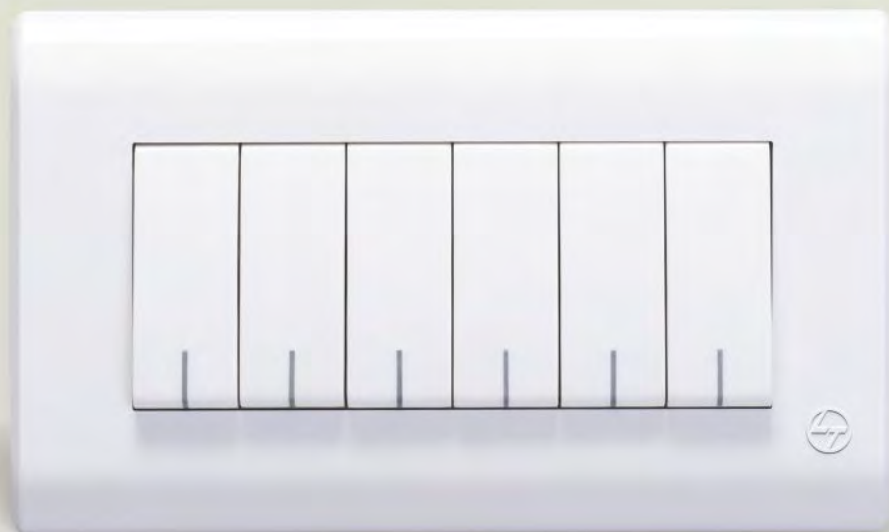
There's music in everything.











# Oris

Every now and then, we find music in everything we see.

Probably because music in some form is present everywhere.

Only sometimes, it comes out in silent notes composed by simple things  
that make a world of difference.

L&T presents Oris, a brand of switches inspired by music,  
to shower your walls in silent symphony.





# The introduction of Intelli-i

Intelli-I is a smart LED indicator in the switch that helps to  
identify its position. The grey insert is used to turn on the switch  
and the red LED indicates that it's turned on.

The blue LED makes locating the switches in the dark easy,  
so you don't stumble in emergencies.







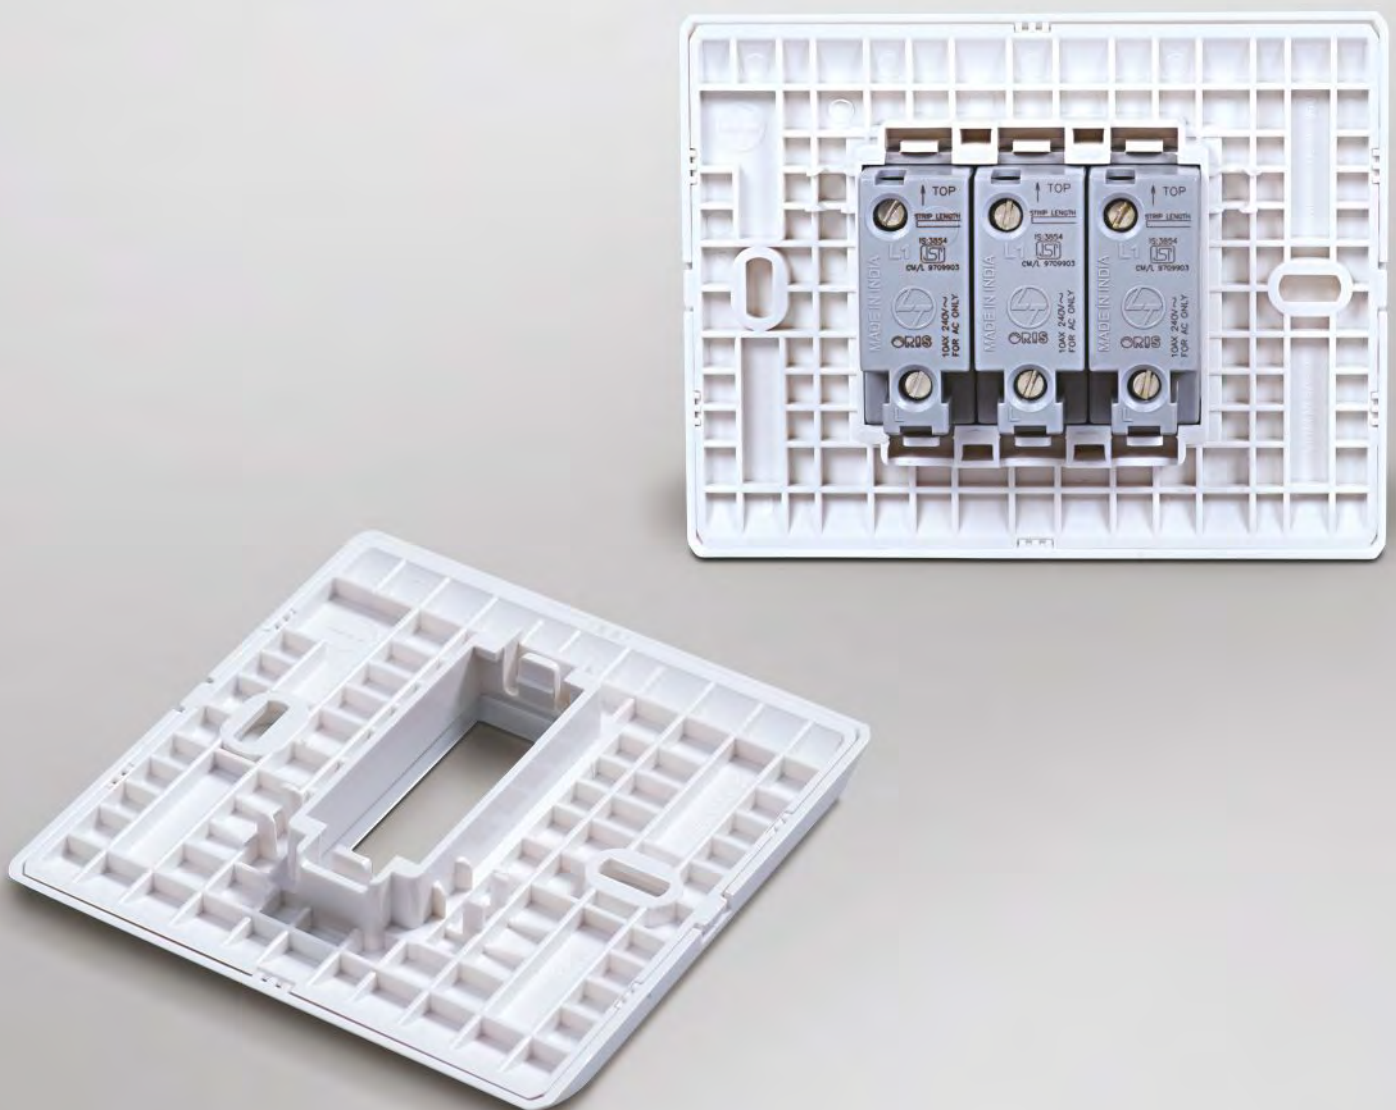
# The base of Safety

Oris is made keeping your home in mind.

It is the perfect companion for the safety of your walls  
with features like captive terminals, positive locking and honeycomb grid plates.

Oris ensures that it prevents any mishap from  
shocks or fire and your home stays safe.

The way homes should be.











# The harmony of Easyclean

Oris is designed to look majestic in the dustiest of places.

High precision surface, engineered to finish using  
virgin polycarbonate prevents dust from settling on it.

Further, the surface can be easily cleaned with a piece of cloth.

No matter how dusty it is, radiance is but a wipe away.











# The rhythm of a Long Life

With high conductivity and low heating and sparking,

the switches promise a life of 1.5 Lac switching operations.

The spring loaded, glass filled Nylon 6/6 plunger ensures

that the switches are self-lubricating.

Their high melting point helps avoid wear and tear.

With a life of SMD LEDs over 50,000 burning hours, Oris lives long.

For music is eternal.







# The crescendo of Design

Occupying minimum space (17.5 mm) with a rib less design,

Oris allows more switches to be put in the same size of plate.

It has uniform sockets of three module sizes and can accommodate

last moment changes even after the wall boxes are installed.

Like a variety of notes that adorn a concise piece.

That's music for you.



# L&T - a Many-Splendoured Symphony

to the man in a metropolis, it is the builder of the finest infrastructure;  
to the space scientist, it is the company that manufactures critical systems for space launch vehicles;  
to the refinery technician, it is the designer, manufacturer and supplier of plant and systems;  
to the financial analyst, it is one of India's most reputed companies  
with a robust record of growth and impeccable corporate governance credentials.  
And to the electrical engineer, L&T is a leading player in the electrical and automation industry.







Employees: Over 50,000

Shareholders: Close to 1 million

Exports to over 40 countries

Forbes Asia's 'Fabulous 50'  
- for 3 consecutive years




Company of the year  
- Business Standard and The Economic Times

India's Best Managed Company  
- Business Today - Ernst & Young Study

L&T Ranks First in Quality in India.  
- Wall Street Journal Asia Survey



# Technical Specification

| CATALOGUE NO                                                                        |         | TECHNICAL DATA                                                                                                                                        |                                                                                       |
|-------------------------------------------------------------------------------------|---------|-------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
|    | OS15W06 | SWITCH 6A, 1 WAY<br>Rating : 6AX 240 V, AC<br>Space required : 1 module<br>Terminal size : 1.5--4 mm <sup>2</sup><br>Certification : IS 3854: 1997    |    |
|    | OS16W06 | SWITCH 6A, 2 WAY<br>Rating : 6AX 240 V, AC<br>Space required : 1 module<br>Terminal size : 1.5--4 mm <sup>2</sup><br>Certification : IS 3854 : 1997   |    |
|  | OS15W10 | SWITCH 10A, 1 WAY<br>Rating : 10AX 240 V, AC<br>Space required : 1 module<br>Terminal size : 1.5--4 mm <sup>2</sup><br>Certification : IS 3854: 1997  |  |
|  | OS16W10 | SWITCH 10A, 2 WAY<br>Rating : 10AX 240 V, AC<br>Space required : 1 module<br>Terminal size : 1.5--4 mm <sup>2</sup><br>Certification : IS 3854 : 1997 |  |
|  | OS15W16 | SWITCH 16A, 1 WAY<br>Rating : 16AX 240 V, AC<br>Space required : 1 module<br>Terminal size : 1.5--4 mm <sup>2</sup><br>Certification : IS 3854: 1997  |  |
|  | OS16W16 | SWITCH 16A, 2 WAY<br>Rating : 16AX 240 V, AC<br>Space required : 1 module<br>Terminal size : 1.5--4 mm <sup>2</sup><br>Certification : IS 3854 : 1997 |  |

|                                                                                     |         |                                                                                                                                                                                                                               |                                                                                       |
|-------------------------------------------------------------------------------------|---------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
|    | OS15W20 | <p>SWITCH 20A, 1 WAY</p> <p>Rating : 20A 240 V, AC</p> <p>Space required : 1 module</p> <p>Terminal size : 1.5--4 mm<sup>2</sup></p> <p>Certification : IS 3854: 1997</p>                                                     |    |
|    | OS16W20 | <p>SWITCH 20A, 2 WAY</p> <p>Rating : 20A 240 V, AC</p> <p>Space required : 1 module</p> <p>Terminal size : 1.5--4 mm<sup>2</sup></p> <p>Certification : IS 3854 : 1997</p>                                                    |    |
|    | OS11W06 | <p>SWITCH 6A, 1 WAY</p> <p>Rating : 6AX 240 V, AC</p> <p>Space required : 1 module</p> <p>Terminal size : 1.5--4 mm<sup>2</sup></p> <p>Insert : Grey</p> <p>Certification : IS 3854: 1997</p>                                 |    |
|  | OS12W06 | <p>SWITCH 6A, 2 WAY</p> <p>Rating : 6AX 240 V, AC</p> <p>Space required : 1 module</p> <p>Terminal size : 1.5--4 mm<sup>2</sup></p> <p>Insert : Grey</p> <p>Certification : IS 3854 : 1997</p>                                |  |
|  | OS13W06 | <p>SWITCH 6A, 1 WAY WITH LED INDICATOR</p> <p>Rating : 6AX 240 V, AC</p> <p>Space required : 1 module</p> <p>Terminal size : 1.5--4 mm<sup>2</sup></p> <p>Insert : Red with SMD LED</p> <p>Certification : IS 3854 : 1997</p> |  |
|  | OS11W10 | <p>SWITCH 10A, 1 WAY</p> <p>Rating : 10AX 240 V, AC</p> <p>Space required : 1 module</p> <p>Terminal size : 1.5--4 mm<sup>2</sup></p> <p>Insert : Grey</p> <p>Certification : IS 3854 : 1997</p>                              |  |
|  | OS12W10 | <p>SWITCH 10A, 2 WAY</p> <p>Rating : 10AX 240 V, AC</p> <p>Space required : 1 module</p> <p>Terminal size : 1.5--4 mm<sup>2</sup></p> <p>Insert : Grey</p> <p>Certification : IS 3854 : 1997</p>                              |  |




|                                                                                     |                                                                                                                                                                                                                                                |                                                                                       |
|-------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
|    | <p>OS13W10</p> <p>SWITCH 10A, 1 WAY WITH LED INDICATOR</p> <p>Rating : 10AX 240 V, AC</p> <p>Space required : 1 module</p> <p>Terminal size : 1.5--4 mm<sup>2</sup></p> <p>Insert : Red with SMD LED</p> <p>Certification : IS 3854 : 1997</p> |    |
|    | <p>OS11W16</p> <p>SWITCH 16A, 1 WAY</p> <p>Rating : 16AX 240 V, AC</p> <p>Space required : 1 module</p> <p>Terminal size : 1.5--4 mm<sup>2</sup></p> <p>Insert : Grey</p> <p>Certification : IS 3854 : 1997</p>                                |    |
|    | <p>OS12W16</p> <p>SWITCH 16A, 2 WAY</p> <p>Rating : 16AX 240 V, AC</p> <p>Space required : 1 module</p> <p>Terminal size : 1.5--4 mm<sup>2</sup></p> <p>Insert : Grey</p> <p>Certification : IS 3854 : 1997</p>                                |    |
|  | <p>OS13W16</p> <p>SWITCH 16A, 1 WAY WITH LED INDICATOR</p> <p>Rating : 16AX 240 V, AC</p> <p>Space required : 1 module</p> <p>Terminal size : 1.5--4 mm<sup>2</sup></p> <p>Insert : Red with SMD LED</p> <p>Certification : IS 3854 : 1997</p> |  |
|  | <p>OS11W20</p> <p>SWITCH 20A, 1 WAY</p> <p>Rating : 20A 240 V, AC</p> <p>Space required : 1 module</p> <p>Terminal size : 1.5--4 mm<sup>2</sup></p> <p>Insert : Grey</p> <p>Certification : IS 3854 : 1997</p>                                 |  |
|  | <p>OS12W20</p> <p>SWITCH 20A, 2 WAY</p> <p>Rating : 20A 240 V, AC</p> <p>Space required : 1 module</p> <p>Terminal size : 1.5--4 mm<sup>2</sup></p> <p>Insert : Grey</p> <p>Certification : IS 3854 : 1997</p>                                 |  |
|  | <p>OS13W20</p> <p>SWITCH 20A, 1 WAY WITH LED INDICATOR</p> <p>Rating : 20A 240 V, AC</p> <p>Space required : 1 module</p> <p>Terminal size : 1.5--4 mm<sup>2</sup></p> <p>Insert : Red with SMD LED</p> <p>Certification : IS 3854 : 1997</p>  |  |

|                                                                                     |         |                                                                                                                                                                                                     |                                                                                       |
|-------------------------------------------------------------------------------------|---------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
|    | OS14W06 | SWITCH 6A, 1 WAY NIGHT LOCATOR<br>Rating : 6AX 240 V, AC<br>Space required : 1 module<br>Terminal size : 1.5--4 mm <sup>2</sup><br>Insert : Blue with SMD LED<br>Certification : IS 3854 : 1997     |    |
|    | OS14W10 | SWITCH 10A, 1 WAY NIGHT LOCATOR<br>Rating : 10AX 240 V, AC<br>Space required : 1 module<br>Terminal size : 1.5--4 mm <sup>2</sup><br>Insert : Blue with SMD LED<br>Certification : IS 3854 : 1997   |    |
|    | OB15W06 | BELL PUSH SWITCH<br>Rating : 6AX 240 V, AC<br>Space required : 1 module<br>Terminal size : 1.5--4 mm <sup>2</sup><br>Certification : IS 3854 : 1997                                                 |    |
|  | OB11W06 | BELL PUSH SWITCH<br>Rating : 6AX 240 V, AC<br>Space required : 1 module<br>Terminal size : 1.5--4 mm <sup>2</sup><br>Insert : Grey<br>Certification : IS 3854 : 1997                                |  |
|  | OB13W06 | BELL PUSH SWITCH WITH LED INDICATOR<br>Rating : 6AX 240 V, AC<br>Space required : 1 module<br>Terminal size : 1.5--4 mm <sup>2</sup><br>Insert : Red with SMD LED<br>Certification : IS 3854 : 1997 |  |
|  | OS21W10 | SWITCH 10A, 1 WAY<br>Rating : 10AX 240 V, AC<br>Space required : 2 module<br>Terminal size : 1.5--2.5 mm <sup>2</sup><br>Insert : Grey<br>Certification : IS 3854 : 1997                            |  |
|  | OS22W10 | SWITCH 10A, 2 WAY<br>Rating : 10AX 240 V, AC<br>Space required : 2 module<br>Terminal size : 1.5--2.5 mm <sup>2</sup><br>Insert : Grey<br>Certification : IS 3854 : 1997                            |  |




|                                                                                     |         |                                                                                                                                                                                                         |                                                                                       |
|-------------------------------------------------------------------------------------|---------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
|    | OS23W10 | SWITCH 10A, 1 WAY WITH LED INDICATOR<br>Rating : 10AX 240 V, AC<br>Space required : 2 module<br>Terminal size : 1.5--2.5 mm <sup>2</sup><br>Insert : Red with SMD LED<br>Certification : IS 3854 : 1997 |    |
|    | OS21W16 | SWITCH 16A, 1 WAY<br>Rating : 16AX 240 V, AC<br>Space required : 2 module<br>Terminal size : 1.5--2.5 mm <sup>2</sup><br>Insert : Grey<br>Certification : IS 3854 : 1997                                |    |
|    | OS22W16 | SWITCH 16A, 2 WAY<br>Rating : 16AX 240 V, AC<br>Space required : 2 module<br>Terminal size : 1.5--2.5 mm <sup>2</sup><br>Insert : Grey<br>Certification : IS 3854 : 1997                                |    |
|  | OS23W16 | SWITCH 16A, 1 WAY WITH LED INDICATOR<br>Rating : 16AX 240 V, AC<br>Space required : 2 module<br>Terminal size : 1.5--2.5 mm <sup>2</sup><br>Insert : Red with SMD LED<br>Certification : IS 3854 : 1997 |  |
|  | OS21W20 | SWITCH 20A, 1 WAY<br>Rating : 20A 240 V, AC<br>Space required : 2 module<br>Terminal size : 1.5--2.5 mm <sup>2</sup><br>Insert : Grey<br>Certification : IS 3854 : 1997                                 |  |
|  | OS22W20 | SWITCH 20A, 2 WAY<br>Rating : 20A 240 V, AC<br>Space required : 2 module<br>Terminal size : 1.5--2.5 mm <sup>2</sup><br>Insert : Grey<br>Certification : IS 3854 : 1997                                 |  |
|  | OS23W20 | SWITCH 20A, 1 WAY WITH LED INDICATOR<br>Rating : 20A 240 V, AC<br>Space required : 2 module<br>Terminal size : 1.5--2.5 mm <sup>2</sup><br>Insert : Red with SMD LED<br>Certification : IS 3854 : 1997  |  |


|                                                                                     |                                                                                                                                                                                                                                                                                   |                                                                                       |
|-------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
|    | <p>OS24W20</p> <p>SWITCH 20A DP, 1 WAY WITH LED INDICATOR</p> <p>Rating : 20A DP 240V ,AC</p> <p>Space required : 2 module</p> <p>Terminal size : 2.5 --5 mm<sup>2</sup></p> <p>Insert : Red with SMD LED</p> <p>Certification : IS 3854 : 1997</p>                               |    |
|    | <p>OS24W32</p> <p>SWITCH 32A DP, 1 WAY WITH LED INDICATOR</p> <p>Current rating : 32A DP 240 V, AC</p> <p>Space required : 2 module</p> <p>Terminal size : 2.5 --5 mm<sup>2</sup></p> <p>Insert : Red with SMD LED</p> <p>Certification : IS 3854 : 1997</p>                      |    |
|    | <p>OB23W10</p> <p>BELL PUSH SWITCH 10A WITH LED INDICATOR</p> <p>Rating : 10A X 240 V, AC</p> <p>Space required : 2 module</p> <p>Terminal size : 1.5--2.5 mm<sup>2</sup></p> <p>Insert : Red with SMD LED</p> <p>Certification : IS 3854 : 1997</p>                              |    |
|  | <p>OS31W20</p> <p>MODULAR MOTOR STARTER 20A , 1 Ph</p> <p>Rating : 20 AX, 1 Ph, 240 V, AC</p> <p>Space required : 3 module</p> <p>Terminal size : 6 mm<sup>2</sup> X 2</p> <p>Safety : Overload protection --bimetallic</p> <p>Certification : IS 13947-4-Sec. 1, IEC-947-4-1</p> |  |
|  | <p>OS31W25</p> <p>MODULAR MOTOR STARTER 25A , 1 Ph</p> <p>Rating : 25 AX, 1 Ph, 240 V, AC</p> <p>Space required : 3 module</p> <p>Terminal size : 6 mm<sup>2</sup> X 2</p> <p>Safety : Overload protection --bimetallic</p> <p>Certification : IS 13947-4-Sec. 1, IEC-947-4-1</p> |  |
|  | <p>OS32W20</p> <p>NON MODULAR MOTOR STARTER 20A , 1 Ph</p> <p>Rating : 20 AX, 1 Ph, 240 V, AC</p> <p>Terminal size : 6 mm<sup>2</sup> X 2</p> <p>Safety : Overload protection --bimetallic</p> <p>Certification : IS 13947-4-Sec. 1, IEC-947-4-1</p>                              |  |
|  | <p>OS32W25</p> <p>NON MODULAR MOTOR STARTER 25A , 1 Ph</p> <p>Rating : 25 AX, 1 Ph, 240 V, AC</p> <p>Terminal size : 6 mm<sup>2</sup> X 2</p> <p>Safety : Overload protection --bimetallic</p> <p>Certification : IS 13947-4-Sec. 1, IEC-947-4-1</p>                              |  |



|                                                                                     |                                                                                                                                                                                                                                                                            |                                                                                       |
|-------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
|    | <p>OC11W06</p> <p>SOCKET 6A, 2 PIN</p> <p>Rating : 6A 240 V, AC</p> <p>Space required : 1 module</p> <p>Terminal size : 2.5 mm<sup>2</sup> x 2</p> <p>Pin types : 2 pin round / 2 pin flat</p> <p>Safety Shutter : Yes</p>                                                 |    |
|    | <p>OC31W06</p> <p>SOCKET 6A, 3 PIN</p> <p>Rating : 6A 240 V, AC</p> <p>Space required : 3 module</p> <p>Terminal size : 2.5 mm<sup>2</sup> x 2</p> <p>Pin types : 3 pin round</p> <p>Safety Shutter : Yes</p> <p>Certification : IS 1293 : 2005</p>                        |    |
|   | <p>OC32W06</p> <p>SOCKET 6A, 2 + 3 PIN</p> <p>Rating : 6A 240 V, AC</p> <p>Space required : 3 module</p> <p>Terminal size : 2.5 mm<sup>2</sup> x 2</p> <p>Pin types : 3 pin round / 2 pin round</p> <p>Safety Shutter : Yes</p> <p>Certification : IS 1293 : 2005</p>      |   |
|  | <p>OC31W16</p> <p>SOCKET 16A, 3 PIN</p> <p>Rating : 16A (Tested for 25A) 240 V, AC</p> <p>Space required : 3 module</p> <p>Terminal size : 2.5 mm<sup>2</sup> x 2</p> <p>Pin types : 3 pin round</p> <p>Safety Shutter : Yes</p> <p>Certification : IS 1293 : 2005</p>     |  |
|  | <p>OC32W66</p> <p>SOCKET 6/16A, 3 PIN</p> <p>Rating : 6/16A (Tested for 25A) 240 V, AC</p> <p>Space required : 3 module</p> <p>Terminal size : 2.5 mm<sup>2</sup> x 2</p> <p>Pin types : 3 pin round</p> <p>Safety Shutter : Yes</p> <p>Certification : IS 1293 : 2005</p> |  |
|  | <p>OC32W13</p> <p>SOCKET 13A, UNIVERSAL PIN</p> <p>Rating : 13A 240 V, AC</p> <p>Space required : 3 module</p> <p>Terminal size : 1.5 mm<sup>2</sup> x 2</p> <p>Pin types : 3 pin round / 2 pin round /<br/>3 pin flat / 2 pin flat</p> <p>Safety Shutter : Yes</p>        |  |

|                                                                                     |         |                                                                                                                                                                                                                                  |                                                                                       |
|-------------------------------------------------------------------------------------|---------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
|    | OC31W25 | SOCKET 25A , 3 PIN<br>Rating : 25A<br>Space required : 3 module<br>Terminal size : 2.5 mm <sup>2</sup> X 2<br>Pin types : 3 pin round<br>Safety Shutter : Yes                                                                    |    |
|    | OR21W01 | FAN REGULATOR<br>Power rating : 100 W<br>Space required : 2 module<br>Rotary type : 4 step                                                                                                                                       |    |
|    | OR22W01 | FAN REGULATOR 360°<br>Power rating : 120 W<br>Space required : 2 module<br>Rotary type : 5 step                                                                                                                                  |    |
|   | OD21W04 | LAMP DIMMER<br>Power rating : min 60 W -- max 400 W, 240V AC<br>Space required : 2 module<br>Rotary type : smooth with switch<br>Type of lamp : Incandescent bulb<br>Terminal size : 1.5 mm <sup>2</sup> x 2.5 mm <sup>2</sup>   |   |
|  | OD31W06 | LAMP DIMMER<br>Power rating : min 75 W -- max 650 W, 240V AC<br>Space required : 3 module<br>Rotary type : smooth with switch<br>Type of lamp : Incandescent bulb<br>Terminal size : 1.5 mm <sup>2</sup> x 2.5 mm <sup>2</sup>   |  |
|  | OD31W10 | LAMP DIMMER<br>Power rating : min 100 W -- max 1000 W, 240V AC<br>Space required : 3 module<br>Rotary type : smooth with switch<br>Type of lamp : Incandescent bulb<br>Terminal size : 1.5 mm <sup>2</sup> x 2.5 mm <sup>2</sup> |  |
|  | OT11W00 | TV SOCKET<br>Connector type : TV connector<br>Space required : 1 module                                                                                                                                                          |  |
|  | OT11W11 | TELEPHONE SOCKET<br>Connector type : RJ 11<br>Space required : 1 module<br>Safety Shutter : Yes                                                                                                                                  |  |



|                                                                                     |         |                                                                                                                                                                                                                                                                                                            |                                                                                       |
|-------------------------------------------------------------------------------------|---------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
|    | OT12W11 | <p>TWIN TELEPHONE SOCKET</p> <p>Connector type : RJ 11</p> <p>Space required : 1 module</p> <p>Safety Shutter : Yes</p>                                                                                                                                                                                    |    |
|    | OT11W45 | <p>DATA SOCKET</p> <p>Connector type : RJ 45</p> <p>Space required : 1 module</p> <p>Safety Shutter : Yes</p> <p>Performance : Cat. 6 (Cat.5e) EIA / TIA 568B, 2-1 Standard</p> <p>Housing : ABS &amp; PC mixed, UL 94V0</p> <p>Contact : 50 micro-inch gold plated over nickel</p> <p>Type : Keystone</p> |    |
|   | OA10W00 | <p>BLANKING PLATE</p> <p>Space required : 1 module</p>                                                                                                                                                                                                                                                     |   |
|  | OA11W00 | <p>INDICATOR LIGHT</p> <p>Lamp : SMD LED Red</p> <p>Space required : 1 module</p> <p>Terminal size : 1.5--4 mm<sup>2</sup></p> <p>LENS : Frosted white</p>                                                                                                                                                 |  |
|  | OA13W00 | <p>CABLE OUTLET</p> <p>Description: Cable outlet with cable grip</p> <p>Space required : 1 module</p> <p>Suitable upto 2 no.s of Cat 3 (standard TV cable)</p>                                                                                                                                             |  |
|  | OA21W00 | <p>BUZZER</p> <p>Type : Electronic</p> <p>Space required : 2 module</p> <p>Sound Type : Electronic tweet</p>                                                                                                                                                                                               |  |
|  | OL61W06 | <p>LED FOOTLIGHT</p> <p>Rating : 1W, 240 V AC</p> <p>Lamp : SMD LED White</p> <p>Space required : 6 modules</p> <p>Terminal size : 1.5--4 mm<sup>2</sup></p> <p>LENS : Fresnel</p>                                                                                                                         |  |

|                                                                                     |                                                                                                                                                                                                                                                                                         |                                                                                       |
|-------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
|    | <p><b>OH11W00</b></p> <p>DND + MMR LED INDICATOR</p> <p>Indication : Do not disturb icon - Red SMD LED</p> <p>Make My Room icon - Green SMD LED</p> <p>Space required : 1 module</p> <p>Terminal size : 1.5--2.5 mm<sup>2</sup></p> <p>Insert : Grey</p>                                |    |
|    | <p><b>OH21W00</b></p> <p>DND + MMR SELECTOR SWITCH</p> <p>Rating : 10AX 240 V AC</p> <p>Space required : 2 module</p> <p>Terminal size : 1.5 -- 2.5 mm<sup>2</sup></p> <p>Switch type : Rotary selector - 3 STEP</p>                                                                    |    |
|    | <p><b>OH41W20</b></p> <p>ELECTRONIC KEY TAG</p> <p>Rating : 20A 240 V, AC</p> <p>Space required : 4 module</p> <p>Terminal size : 1.5--2.5 mm<sup>2</sup></p> <p>Delay OFF time : 30 sec</p> <p>Indication : Green LED</p> <p>Type of card : Standard credit card size</p>              |    |
|  | <p><b>OH42W20</b></p> <p>MECHANICAL KEY TAG</p> <p>Rating : 20 A DP 240V, AC</p> <p>Space required : 4 module</p> <p>Terminal size : 1.5--2.5 mm<sup>2</sup></p> <p>Indication : Red SMD LED</p> <p>Tag : PC key holder also available separately (OH40W00)</p>                         |  |
|                                                                                     | <p><b>OH42W32</b></p> <p>MECHANICAL KEY TAG</p> <p>Rating : 32 A DP 240 V, AC</p> <p>Tag : PC key holder also available separately (OH40W00)</p>                                                                                                                                        |                                                                                       |
|  | <p><b>OH61W00</b></p> <p>SHAVER SOCKET</p> <p>Rating Input :230V AC 50 Hz</p> <p>Output : 20VA, 115V / 230V</p> <p>Space required : 6 module</p> <p>Terminal size : 1.5--2.5 mm<sup>2</sup></p> <p>Transformer : Heavy duty copper winding</p> <p>Protection : Over load protection</p> |  |
|  | <p><b>OH31W00</b></p> <p>VOLUME CONTROLLER</p> <p>Space required : 3 module</p>                                                                                                                                                                                                         |  |




|                                                                                     |         |                                                                                               |                                                                                       |
|-------------------------------------------------------------------------------------|---------|-----------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
|    | OF11W00 | 1 MODULE FACE & GRID PLATE<br>Size : 85 X 90                                                  |                                                                                       |
|    | OF21W00 | 2 MODULE FACE & GRID PLATE<br>Size : 85 X 90                                                  |                                                                                       |
|    | OF31W00 | 3 MODULE FACE & GRID PLATE<br>Size : 115 X 90                                                 |                                                                                       |
|    | OF32W00 | 3 MODULE MINI FACE & GRID PLATE<br>Size : 96 X 90                                             |                                                                                       |
|    | OF41W00 | 4 MODULE FACE & GRID PLATE<br>Size : 115 X 90                                                 |                                                                                       |
|   | OF61W00 | 6 MODULE FACE & GRID PLATE<br>Size : 151 X 90                                                 |                                                                                       |
|  | OF81W00 | 8 MODULE FACE & GRID PLATE<br>Size : 217 X 90                                                 |                                                                                       |
|  | OF10W02 | 10 MODULE FACE & GRID PLATE<br>Size : 238 X 90                                                |                                                                                       |
|  | OF10W03 | 10 MODULE 433 FACE & GRID PLATE<br>Size : 238 X 90                                            |                                                                                       |
|  | OF12W00 | 12 MODULE FACE & GRID PLATE<br>Size 151 X 155                                                 |                                                                                       |
|  | OF16W00 | 16 MODULE FACE & GRID PLATE<br>Size : 222 X 155                                               |                                                                                       |
|  | OF24W00 | 24 MODULE FACE & GRID PLATE<br>Size 222 X 220.4                                               |                                                                                       |
|  | OW21M00 | 1 & 2 MODULE RECESS METAL WALL BOX<br>Material : 20 GAUGE (1mm) GI<br>Size : 77.8 X 77 X 51.2 |  |

|                                                                                     |         |                                                                                                |                                                                                       |
|-------------------------------------------------------------------------------------|---------|------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
|    | OW41M00 | 3 & 4 MODULE RECESS METAL WALL BOX<br>Material : 20 GAUGE (1mm) GI<br>Size : 106 X 77 X 51.2   |    |
|    | OW61M00 | 6 MODULE RECESS METAL WALL BOX<br>Material : 20 GAUGE (1mm) GI<br>Size : 138.4 X 77 X 51.2     |    |
|    | OW81M00 | 8 MODULE RECESS METAL WALL BOX<br>Material : 20 GAUGE (1mm) GI<br>Size : 211.3 X 77 X 51.2     |    |
|    | OW10M00 | 10 MODULE RECESS METAL WALL BOX<br>Material : 20 GAUGE (1mm) GI<br>Size : 228.1 X 77 X 51.2    |    |
|    | OW12M00 | 12 MODULE RECESS METAL WALL BOX<br>Material : 20 GAUGE (1mm) GI<br>Size : 137.3 X 137.6 X 51.2 |    |
|    | OW16M00 | 16 MODULE RECESS METAL WALL BOX<br>Material : 20 GAUGE (1mm) GI<br>Size : 211.3 X 138 X 51.2   |    |
|  | OW24M00 | 24 MODULE RECESS METAL WALL BOX<br>Material : 18 GAUGE (1.2mm) GI<br>Size : 211.6 X 212 X 51.2 |  |
|  | OW21W00 | 1 & 2 MODULE SURFACE WALL BOX<br>Material : FR GRADE PC, UL V0<br>Size : 84 X 89 X 52.5        |  |
|  | OW41W00 | 3 & 4 MODULE SURFACE WALL BOX<br>Material : FR GRADE PC, UL V0<br>Size : 114 X 89 X 52.5       |  |
|  | OW61W00 | 6 MODULE SURFACE WALL BOX<br>Material : FR GRADE PC, UL V0<br>Size : 150 X 89 X 52.5           |  |
|  | OW81W00 | 8 MODULE SURFACE WALL BOX<br>Material : FR GRADE PC, UL V0<br>Size : 211 X 89 X 52.5           |  |
|  | OW10W00 | 10 MODULE SURFACE WALL BOX<br>Material : FR GRADE PC, UL V0<br>Size : 232 X 89 X 52.5          |  |
|  | OW12W00 | 12 MODULE SURFACE WALL BOX<br>Material : FR GRADE PC, UL V0<br>Size : 150 X 144.7 X 52.5       |  |
|  | OW16W00 | 16 MODULE SURFACE WALL BOX<br>Material : FR GRADE PC, UL V0<br>Size : 216 X 144.7 X 52.5       |  |

All Sizes in mm



|                                                                                     |                                                                                                                                                                                                                   |                                                                                       |
|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
|    | <p>OS13W13</p> <p>SAFETY POWER STRIP</p> <p>Power rating : 13A, 240V AC</p> <p>Space required : 10 module</p> <p>Pre-wired assembly</p> <p>Inbuilt overload &amp; spike protection</p> <p>3 Universal sockets</p> |                                                                                       |
|    | <p>OS61W25</p> <p>SAFETY AC POWER UNIT</p> <p>Power rating : 25A, 240V AC</p> <p>Space required : 6 module</p> <p>Pre-wired assembly</p>                                                                          |                                                                                       |
|    | <p>OP01W06</p> <p>PLUG TOP</p> <p>Rating : 6A 240 V, AC</p> <p>Insert : Grey</p> <p>Certification : IS 1293 : 2005</p>                                                                                            |    |
|  | <p>OP03W06</p> <p>PLUG TOP</p> <p>Rating : 6A 240 V, AC</p> <p>Insert : Red with SMD LED</p> <p>Certification : IS 1293 : 2005</p>                                                                                |  |
|  | <p>OP01W16</p> <p>PLUG TOP</p> <p>Rating : 16A 240 V, AC (Tested for 25A)</p> <p>Insert : Grey</p> <p>Certification : IS 1293 : 2005</p>                                                                          |  |
|  | <p>OP03W16</p> <p>PLUG TOP</p> <p>Rating : 16A 240 V, AC (Tested for 25A)</p> <p>Insert : Red with SMD LED</p> <p>Certification : IS 1293 : 2005</p>                                                              |  |
|  | <p>OP01W25</p> <p>PLUG TOP</p> <p>Rating : 25A 240 V, AC</p> <p>Insert : Grey</p>                                                                                                                                 |  |
|  | <p>OA03W01</p> <p>LAMP HOLDER</p> <p>Unique Design</p> <ul style="list-style-type: none"> <li>- Angle Holder</li> <li>- Batten Holder</li> </ul>                                                                  |  |

|                                                                                     |                                                                                                                                                                                                                                                                                                                                                                      |                                                                                       |
|-------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
|    | <p>OA20W00</p> <p>CEILING ROSE</p> <p>Jumbo Ceiling Rose</p>                                                                                                                                                                                                                                                                                                         |    |
|    | <p>OA04W13</p> <p>SPIKE GUARD</p> <p>Rating : 10A 240 V, AC</p> <p>Maximum Load – 2500W</p> <p>Maximum Surge Absorption Capacity – 235 Joules</p> <p>Maximum Spike Current – 6500 A</p> <p>Resettable fuse</p> <p>4 Universal Sockets</p>                                                                                                                            |    |
|    | <p>OA05W06</p> <p>SPIKE GUARD WITH TWIN USB CHARGER</p> <p>Rating : 6A, 240V, AC</p> <p>USB charger Rating : Output - 2000mA, 5V DC</p> <p>Overload Protection</p> <p>Maximum Load – 1500W</p> <p>Maximum Surge Absorption Capacity – 175 Joules</p> <p>Maximum Spike Current – 6000A</p> <p>Resettable fuse</p> <p>3 Universal Sockets &amp; 2 USB charger port</p> |    |
|  | <p>OB31W00</p> <p>DIGITAL DING DONG DOOR BELL</p> <p>Tunes – 7 Digital Ding Dong Tunes</p> <p>Tune selector switch</p> <p>COB (Chip on Board) based technology</p> <p>Battery operated – (2 x 1.5V AA)</p> <p>High quality speaker</p>                                                                                                                               |  |
|  | <p>OB32W00</p> <p>MANTRAS DOOR BELL</p> <p>Tunes – 10 Mantra Tunes</p> <p>Tune selector switch</p> <p>COB (Chip on Board) based technology</p> <p>Battery operated – (2 x 1.5V AA)</p> <p>High quality speaker</p>                                                                                                                                                   |  |
|  | <p>OB33W00</p> <p>ENGLISH MELODY DOOR BELL</p> <p>Tunes – 25 English Tunes</p> <p>Tune selector switch</p> <p>COB (Chip on Board) based technology</p> <p>Battery operated – (2 x 1.5V AA)</p> <p>High quality speaker</p>                                                                                                                                           |  |



## Electrical Standard Products (ESP) Branch Offices:

### REGISTERED OFFICE AND HEAD OFFICE

L&T House, Ballard Estate  
P. O. Box 278  
**Mumbai** 400 001  
Tel: 022-67525656  
Fax: 022-67525858  
Website: www.Larsentoubro.com

### ELECTRICAL STANDARD PRODUCTS (ESP)

501, Sakar Complex I  
Opp. Gandhigram Rly. Station  
Ashram Road  
**Ahmedabad** 380 009  
Tel: 079-66304006 / 07 / 08 / 09 / 10 / 11  
Fax: 079-66304025  
e-mail: esp-ahm@Lntebg.com

38, Cubbon Road, P. O. Box 5098  
**Bangalore** 560 001  
Tel: 080-25020100 / 0324  
Fax: 080-25580525  
e-mail: esp-blr@Lntebg.com

131/1, Zone II  
Maharana Pratap Nagar  
**Bhopal** 462 011  
Tel: 0755-3080511 / 05 / 08 / 13 / 17 / 19  
Fax: 0755-3080502  
e-mail: esp-bho@Lntebg.com

Plot No. 559, Annapurna Complex  
Lewis Road  
**Bhubaneswar** 751 014  
Tel: 0674-6451342, 2436690 / 6  
Fax: 0674-2537309  
e-mail: esp-bbi@Lntebg.com

Aspire Towers, 4th Floor  
Plot No. 55, Phase-I  
Industrial & Business Park  
**Chandigarh** 160 002  
Tel: 0172-4646840 / 41 / 42 / 46 / 53  
Fax: 0172-4646802  
e-mail: esp-chd@Lntebg.com

L&T Construction Campus  
TC-1 Building, II Floor  
Mount-Poonamallee Road  
Manapakkam  
**Chennai** 600 089  
Tel: 044-2270 6800 / 1  
Fax: 044-22706940 / 30  
e-mail: esp-maa1@Lntebg.com

67, Appuswamy Road  
Post Bag 7156  
Opp. Nirmala College  
**Coimbatore** 641 045  
Tel: 0422-2588120 / 1 / 5  
Fax: 0422-2588148  
e-mail: esp-cbe@Lntebg.com

Khairasol, Degaul Avenue  
**Durgapur** 713 212  
Tel: 2559848 / 849 / 844  
Fax: 0343-2553614  
e-mail: esp-dgp@Lntebg.com

5, Milanpur Road, Bamuni Maidan  
**Guwahati** 781 021  
Tel: +91-8876554410 / 7  
Fax: 361-2551308  
e-mail: hazrasudipto@Lntebg.com

II Floor, Vasantha Chambers  
5-10-173, Fateh Maidan Road  
**Hyderabad** 500 004  
Tel: 040-67015052, 66720210  
Fax: 040-23296468, 23242356  
e-mail: esp-hyd@Lntebg.com  
ese-hyd@Lntebg.com

Monarch Building, 1st Floor  
D-236 & 237, Amrapali Marg  
Vaishali Nagar  
**Jaipur** 302 021  
Tel: 0141-4385914 / 15 / 16 / 17 / 18  
Fax: 0141-4385925  
e-mail: esp-jai@Lntebg.com

Akashdeep Plaza, 2nd Floor  
P. O. Golmuri  
**Jamshedpur** 831 003  
Jharkhand  
Tel: 0657-2312205 / 38  
Fax: 0657-2341250  
e-mail: esp-jam@Lntebg.com

Skybright Bldg; M. G. Road  
Ravipuram Junction, Ernakulam  
**Kochi** 682 016  
Tel: 0484-4409420 / 4 / 5 / 7  
Fax: 0484-4409426  
e-mail: esp-cok@Lntebg.com

3-B, Shakespeare Sarani  
**Kolkata** 700 071  
Tel: 033-44002572 / 3 / 4 / 50 / 58  
Fax: 033-22821025 / 7587 / 7857 / 1025  
e-mail: esp-ccu@Lntebg.com  
ese-kol@Lntebg.com

A28, Indira Nagar, Faizabad Road  
**Lucknow** 226 016  
Tel: 0522-4929905 / 04  
Fax: 0522-2311671  
e-mail: esp-lko@Lntebg.com

No: 73, Karpaga Nagar, 8th Street  
K. Pudur  
**Madurai** 625 007  
Tel: 0452-2537404, 2521068  
Fax: 0452-2537552  
e-mail: esp-mdu@Lntebg.com

L&T Business Park  
Tower 'B' / 5th Floor  
Saki Vihar Road, Powai  
**Mumbai** 400 072  
Tel: 022-67052874 / 2737 / 1156  
Fax: 022-67051112  
e-mail: esp-bom@Lntebg.com

12, Shivaji Nagar  
North Ambazari Road  
**Nagpur** 440 010  
Tel: 0712-2260012 / 6606421  
Fax: 0712-2260030 / 6606434  
e-mail: esp-nag@Lntebg.com

32, Shivaji Marg  
P. O. Box 6223  
**New Delhi** 110 015  
Tel: 011-41419514 / 5 / 6 / 9620 / 9942  
Fax: 011-41419600 / 9625  
e-mail: esp-del@Lntebg.com  
ese-del@Lntebg.com

L&T House  
P. O. Box 119  
191/1, Dhole Patil Road  
**Pune** 411 001  
Tel: 020-66033395 / 3279  
Fax: 020-26164048 / 4910  
e-mail: esp-pnq@Lntebg.com

Crystal Tower, Plot No. 606/1  
4th Floor, G. E. Road  
Telibandha  
**Raipur** 492 006  
Tel: 0771-4283214  
e-mail: esp-raipur@Lntebg.com

3rd Floor  
Vishwakarma Chambers  
Majura Gate, Ring Road  
**Surat** 395 002  
Tel: 0261-2473726  
Fax: 0261-2477078  
e-mail: esp-sur@Lntebg.com

Radhadaya Complex  
Old Padra Road  
Near Charotar Society  
**Vadodara** 390 007  
Tel: 0265-6613610 / 1 / 2 / 37 / 38  
Fax: 0265-2336184  
e-mail: esp-bar@Lntebg.com  
ese-vad@Lntebg.com

Door No. 49-38-14/3/2, 1st floor  
NGGO's Colony, Akkayyapalem  
**Visakhapatnam** 530 016  
Tel: 0891 2791126, 2711125  
Fax: 0891 2791100  
e-mail: esp-viz@Lntebg.com

Product improvement is continuous process. For the latest information and special applications, please contact any of our offices listed here.



Larsen & Toubro Limited, Electrical Standard Products  
Powai Campus, Mumbai 400 072

### Customer Interaction Center (CIC)

BSNL / MTNL (toll free): 1800 233 5858 Reliance (toll free): 1800 200 5858  
Tel: 022 6774 5858 Fax: 022 6774 5859 Email: cic@Lntebg.com  
Web: www.Lntebg.com

Registered Office:  
L&T House, N. M. Marg  
Ballard Estate  
Mumbai 400 001, INDIA  
CIN: L99999MH1946PLC004768