

# NQube

## Outdoor Compact Substation



**NQube** is part of the wide range of product offerings from L&T Electrical & Automation. It is a compact MV/LV substation for outdoor application, designed in line with IEC 62271 - 202. It functions as a substation in secondary distribution networks. Incorporating L&T's standard electrical components, NQube provides maintenance-free operation throughout its life-span.


**NQube** is:


- Fully factory assembled & tested
- Modular & compartmentalized
- Reinforced with specially designed ventilation system
- Completely safe for operators
- Ready for installation & network connection
- SCADA compatible & ready to use in smart grid

---


L&T Electrical and Automation is a part of the multi-billion-dollar technology, engineering, construction manufacturing and services, Larsen & Toubro conglomerate. We design, manufactures and market a wide range of low voltage and medium voltage electrical systems, control and automation systems, electrical products and metering and protection systems.

---

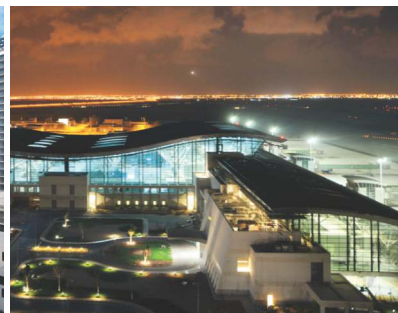


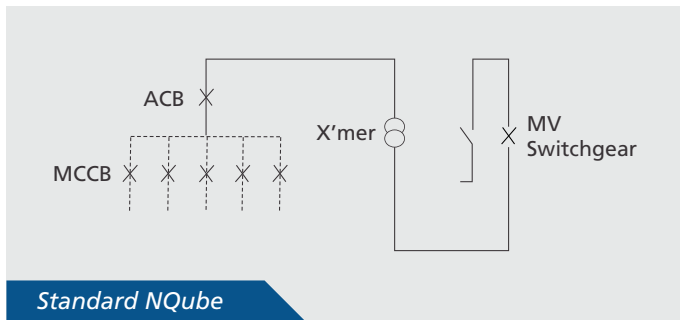


Standard NQube

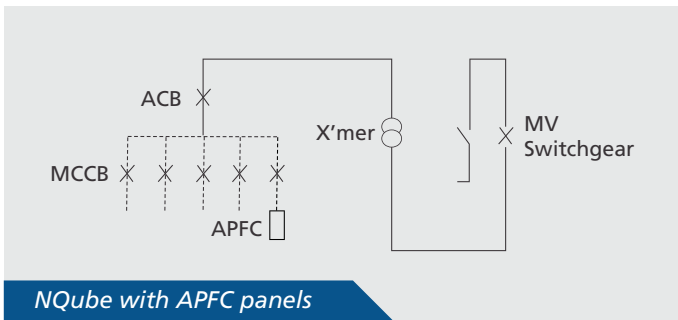

NQube with APFC panels

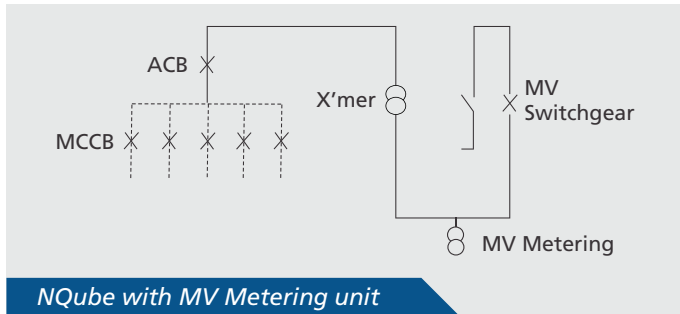

NQube with MV Metering unit

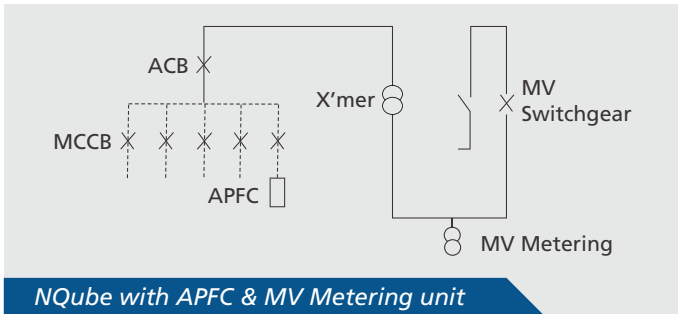

NQube with APFC & MV Metering unit

three way RMU for ring applications are available

### LV switchgear

- Rated up to 2000A, 440V
- Completely customizable
- With L&T's proven standard components i.e. Air Circuit Breakers, Moulded Case Circuit Breakers etc.
- Flexibility in arrangements & configurations
- Maximum 8 nos. of outgoing MCCB feeders with one incomer ACB feeder

### Transformer

- Up to 1250kVA
- Choice of oil type & dry type transformers
- Hermetically sealed corrugated type oil transformer
- Minimal losses
- Off Load Tap Changing
- On load Tap Changing OLTC with RTCC and AVR
- Complaint to K/10 as per IEC 62271 - 202

### MV switchgear

- L&T-make 12kV, 630A, 21kA, RMU
- Robotic welding of gas tank ensures leakage free operation
- Internal arc fault tested for 21kA, 1S complying with AFLR IEC 62271 - 200
- Ample space for CT mounting
- Minimal maintenance & sealed for life
- No exposure to live parts

Product type	Up to 315kVA	990kVA	1250kVA
Rated voltage (MV / LV)	12kV / 440V		
Rated current (MV / LV)	630A / 500A	630A / 1600 A	630A / 2000A
Rated Power Frequency Withstand Voltage	28kV		
Rated Lightning Impulse withstand voltage	75kV		
Rated Short Time Current rating - MV / LV	21kA(3s) / 50kA(1s)		
Dimension (W x D x H) in mm*	2500 x 2100 x 2600	3400 x 2100 x 2600	3650 x 2100 x 2600
Ingress Protection (MV / Trans / LV)	IP 54 / IP23D / IP54		
Temperature Class	K10		

\* Subject to change as per specification



### Larsen & Toubro Limited, Electrical Systems & Equipment

Head Office - L&T Gate No. 5, L&T Business Park TC - II, Tower B - 7<sup>th</sup> floor, Saki-Vihar Road, Powai, Mumbai 400 072 Tel.: +91 22 6705 1748 Fax: +91 22 6705 1556 Email: ese-cmt@lntebg.com Website: www.lntebg.com

Registered Office: Larsen & Toubro Limited, L&T House, N. M. Marg, Ballard Estate Mumbai - 400 001, INDIA CIN: L99999MH1946PLC004768

The information contained herein is correct at the time of printing, but as L&T's products and manufacturing processes undergo continuous development, this information is subject to change without notice. and the company cannot be held liable for any alleged misinterpretation howsoever arising.

### Sales Office - India

Bengaluru, Chennai, Hyderabad, Kolkata, Mumbai, New Delhi, Pune, Vadodara

### Sales Office - International

Australia, Indonesia, Kuwait Malaysia, Oman, Qatar, Saudi Arabia, South Afrika, South Korea, Turkey, UAE